



Duratap The most wear-resistant coir mat

Type	Use	Traffic	Mat Matrix
Scraping	Indoor	Medium	B




Duratap is the most wear-resistant coir mat we've ever made. Unique features are its high use class rating of 32 (commercial use) and its fire protection class rating of Cfl-s1. This heavy-duty, tightly tufted mat makes access easy for wheelchairs and rollators.

Design

This thick, firm coir mat has a stiff, bristly feel. With the classic touch of coir. Natural variations in the yarn give the mat beautiful colour gradients. These vary from one mat to another, which makes for subtle colour nuances. The distinctive look of coir means this mat complements both classic and modern interiors. Duratap is available in natural and graphite.

Matching all floors

Our designers develop colourways that complement every interior style. For ambiances ranging from classic to modern design. The broad Rinos range always has the right solution, to complement both interior design and floor type. **Make your own combination on our website and be inspired by our options.**

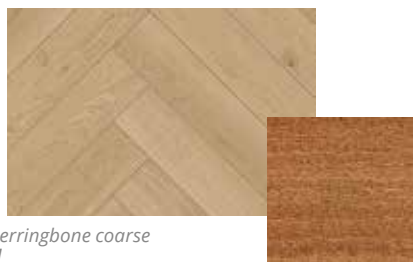

Wood light oak floor herringbone coarse with Duratap naturel

Colours



Naturel
K19
NCS: 3040Y20R




Graphite
K17G



Specifications

PVC

Pile material	100% machine-spun coconut fibre yarns
Pile weight ISO 8543	Natural: 17 mm: ± 3,50 kg m ² 20 mm: ± 4,10 kg m ² 23 mm: ± 4,75 kg m ² Colour: 17 mm: ± 3,50 kg m ² 23 mm: ± 4,75 kg m ²
Use classification EN 1307	32
Flammability Euroclass EN 13501	Cfl/s1
Sizes rolls ***	100/200 cm, ± 10 m ¹
Backing	Phtalate-free PVC with integrated stability scrim
Absorption capacity TNO W6034	17 mm ± 8,4 l/m ²
Total weight ISO 8543	Natural: 17 mm: ± 6,85 kg m ² 20 mm: ± 7,45 kg m ² 23 mm: ± 8,10 kg m ² Colour: 17 mm: ± 6,85 kg m ² 23 mm: ± 8,10 kg m ²
Pile height ISO 1766	Natural: 14, 17 and 20 mm Colour: 14 and 20 mm
Total height ISO 1765	Natural: 17, 20 and 23 mm Colour: 17 and 23 mm
Pile density ISO 8543	NPD
Number of stitches ISO 1763	± 41.800 /m ² (17 mm)
Wearing class EN 1963	32
Comfort EN 1307	LC5
Dimensional stability ISO 2551	NPD
Light fastness ISO 105 B02	Natural: >6 Colour: 4-5
Water fastness ISO 105 B01	3-4
Rubbing fastness ISO 105 X12	3-4
Salt water ISO 105 E02	Natural: 3-4, Colour: NPD
Shampoo BS 1006	Natural: 3-4, Colour: NPD
Organic solvents ISO 105 X05	Natural: 3-4, Colour: NPD
Static charge ISO 6356	2,0 kV
Slip Resistance EN 13893	DS
Yarn construction	Cut pile
Design	Plain
Colours	2
Suitability for stairs EN 1963	NPD
Suitability for castor chairs EN 985	NPD
Declaration of Performance	Available

 Excluding loose-laid mats
EN 14041:2004

* The roll lengths are an indication. Delivered length can be up to 15% higher or lower. Installation and maintenance advice is available on our website.

Duratap's colour works well with both modern and classic interiors. Coir mats should, however, only be used indoors. In situations with excessive moisture, such as very wet cleaning processes or lots of snow, the mat may shed colour.

Contact us for more information

Our employees are ready to answer questions or to take your orders. **Call +31 38 385 35 00** or mail customerservice@rinos.com

Where to use?

	high traffic	medium traffic
Not combined with outdoor matting (scraping)	A	B
Combined with outdoor matting (absorbing)	C	D
Outdoor matting	E	

© Rinos B.V.