




Grafic

Grafic is different. You can see that right away. A walk-off entrance mat available in one, perfectly-chosen background colour. With subtle, graphic patterning. This pattern may seem like a small detail. But this mat will make a world of difference to your entrance area.

And we have made absolutely no concessions in terms of quality. This is reflected in Grafic's highest standards of wear resistance (usage class 33), sand absorption (class 3) and moisture absorption. We also developed a new, high-performance, scraper base material for Grafic. It is designed for project applications - and for efficiency you can rely on.

The dark-grey, base material is printed with a choice of five, unusual graphics. The result? From close up one notices subtle attention to design detail, but from a distance the design remains restful. While your premises are kept clean and safe.

At last! A project-quality mat that features graphic design - and excellent performance. Whether in the entrance to a public building, a restaurant, shop, showroom or museum. Not too conspicuous. And certainly never dull!

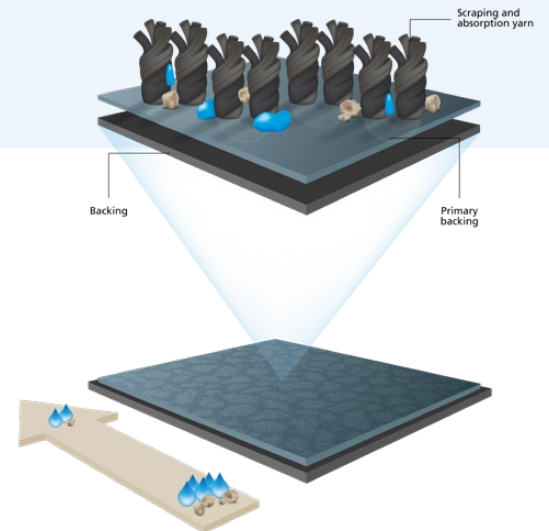



Grafic



Product Information PVC


Pile material	100% recycled (Econyl®) Polyamide	100% recycled (Econyl®) Polyamide
Backing	PVC	PU
Primary backing	nonwoven PET/PA	nonwoven PET/PA
Yarn construction	Velour	Velour
Design	Graphic	Graphic
Patterns	5	5
Pile weight ISO 8543	1.000 g/m ²	1.000 g/m ²
Total weight ISO 8543	ca. 3.800 g/m ²	ca. 3.150 g/m²
Pile height ISO 1766	ca. 7,0 mm	ca. 7,0 mm
Total height ISO 1765	ca. 9,0 mm	ca. 9,0 mm
Pile density ISO 8543	0,128 g/m ²	0,128 g/m ²
Number of stitches ISO 1763	ca. 86.800 /m ²	ca. 86.800 /m ²
Use classification EN 1307	33	33
Wearing class EN 1963	33	33
Comfort EN 1307	LC3	LC3
Suitability for stairs EN 1963	Intensive use	Intensive use
Suitability for castor chairs EN 985	Intensive use	Intensive use
Dimensional stability ISO 2551	< 0,4%	< 0,4%
Light fastness ISO 105 B02	> 7 (scale 1-8)	> 7 (scale 1-8)
Water fastness ISO 105 B01	> 4 (scale 1-5)	> 4 (scale 1-5)
Rubbing fastness ISO 105 X12	> 4 (scale 1-5)	> 4 (scale 1-5)
Salt water ISO 105 E02	4	4
Shampoo BS 1006	4	4
Organic solvents ISO 105 X05	4	4
Absorption capacity TNO W6034	± 4,8 l/m ²	± 4,8 l/m ²
Flammability Euroclass EN 13501	Bfl-s1	Cfl-s1
Slip Resistance EN 13893	DS	DS
Static charge ISO 6356	2,0 kV	2,0 kV
Sand absorption class*	3	3
Optical class**	4.5	4.5
Declaration of Performance	Available	Available
Sizes rolls ***	200 cm/20 m	200 cm/20 m
Roll length	± 20 m	± 20 m
Available in cuts	✓	
Sizes mats***	n.a.	n.a.

* Sand absorption classification Class 3: >=90% Sand absorption classification: 80% =< class 2 < 90% Sand absorption classification Class 1: =< 80% ** Optical classification: 5 indicates highest, 1 indicates lowest *** All listed width dimensions include a PVC edge of 2,5 cm at both sides. The roll lengths are an indication. Delivered length can be up to 15% higher or lower.

Where to use?

	High traffic	Medium traffic
Not combined with outdoor matting	A	B
Combined with outdoor matting	C	D
Outdoor matting	E	

Patterns

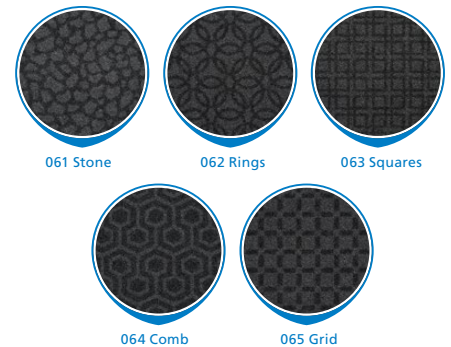

Pattern Repeat

Pattern	Width	Length
Grafic Stone 061	33,3 cm	65,6 cm
Grafic Rings 062	7,4 cm	13,5 cm
Grafic Squares 063	3,7 cm	3,6 cm
Grafic Comb 064	7,4 cm	10,1 cm
Grafic Grid 065	7,4 cm	7,2 cm



EN 14041:2004

Contact us for more information:

Our employees are ready to answer your questions or to take your orders. Call **+31 38 385 35 00**.



RINOS