

Symphony2 – for a cleaner entrance, and a cleaner environment

Symphony2 is a walk-off entrance mat made of regenerated polyamide.

It keeps entrances clean and safe, thanks to its excellent performance.

Available in 10 colours, inspired by the beautiful tones of natural stone.

Symphony2 is a scraping mat for commercial applications in the entrance areas of business premises, offices, staircases, pantries and lifts. The mat is made from Econyl (regenerated polyamide) on a PVC backing, but is also available with Pura Backing (the PVC-free alternative) and is very good at visually concealing dirt. So Symphony2 conceals actual footprints, while reducing your environmental footprint!

Symphony2 comes into its own in the transition from outside to inside. Primarily because of the way it works, but also because of its design. Its natural colours, inspired by the subtle shades

of natural stone, will complement any entrance. The mixture of matt and gloss yarns further help to bring the Symphony2 to life on entrance floors.

In addition, the contrasting natural colours on a black base provide depth. As a result, Symphony2 can visually absorb a lot of dirt. The mat scores 3 for sand absorption (the highest class), is suitable for heavy commercial use (usage class 33), and falls into fire safety class Cfl-s1.

Also with Pura Backing, the PVC-free alternative


Symphony2 is also available with the revolutionary Pura Backing. This backing

does not contain any PVC or plasticizers. As a result it's more environmentally friendly, using 30% less energy and emitting 15% less greenhouse gas during its life cycle. The mat is also easier to lay, being lighter and more flexible than one with a PVC backing. Moreover Pura Backing also prevents discolouration of the floor under the mat.

PURA BACKING

Pura Backing is the answer to increasing demand in both commercial and residential projects for environmental sensitivity and sustainability down to the last detail– including the entrance mat.

Colours




Traffic black
SY51



Signal Black
SY81



Grey brown
SY22




Black grey
SY82



Granite grey
SY61




Quartz Grey
SY11



Silver grey
SY83



Chocolate brown
SY21



Oxid red
SY91



Brown beige
SY31

Specifications


PVC

PURA^{BACKING}

Pile material	100% recycled (Econyl®) Polyamide	100% recycled (Econyl®) Polyamide
Backing	PVC	PU
Primary backing	nonwoven PET/PA	nonwoven PET/PA
Yarn construction	Velours	Velours
Pattern	Mixed	Mixed
Colours	10	10
Pile weight ISO 8543	850 g/m ²	850 g/m ²
Total weight ISO 8543	ca. 3.650 g/m ²	ca. 3.050 g/m²
Pile height ISO 1766	ca. 7,0 mm	ca. 7,0 mm
Total height ISO 1765	ca. 9,0 mm	ca. 9,0 mm
Pile density ISO 8543	0,110 g/m ²	0,110 g/m ²
Number of stitches ISO 1763	ca. 71.000 /m ²	ca. 71.000 /m ²
Use classification EN 1307	33	33
Wearing class EN 1963	33	33
Comfort EN 1307	LC2	LC2
Suitability for stairs EN 1963	Intensive use	Intensive use
Suitability for castor chairs EN 985	Intensive use	Intensive use
Dimensional stability ISO 2551	< 0,3%	< 0,3%
Light fastness ISO 105 B02	7	7
Water fastness ISO 105 B01	4-5	4-5
Rubbing fastness ISO 105 X12	4-5	4-5
Salt water ISO 105 E02	4-5	4-5
Shampoo BS 1006	4-5	4-5
Organic solvents ISO 105 X05	4	4
Absorption capacity TNO W6034	± 5,1 l/m ²	± 5,1 l/m ²
Flammability Euroclass EN 13501	Cfl-s1	Cfl-s1
Slip Resistance EN 13893	DS	DS
Static charge ISO 6356	-0,4 kV	-0,4 kV
Sand absorption class*	3	3
Optical class**	4,5	4,5
Declaration of Performance	Available	Available
Roll dimensions***	135 cm/20 m, 200 cm/20 m	135 cm/20 m, 200 cm/20 m
Roll length	±20 m	±20 m
Mat dimensions***	60*90 cm, 90*150 cm, 135*200 cm	60*90 cm, 90*150 cm, 135*200 cm

Where to use?

	high traffic	medium traffic
Not combined with outdoor matting	A	B
Combined with outdoor matting	C	D
Outdoor matting	E	

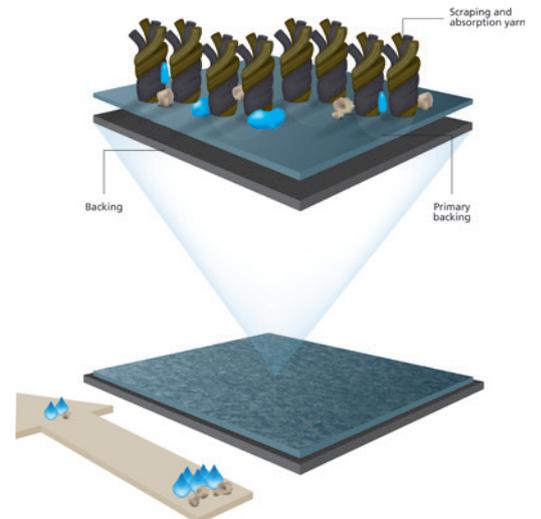

EN 14041:2004

* Sand absorption class 1: =< 80%, Sand absorption class 2: 80% =< class 2 < 90%, Sand absorption class 3: >=90% ** Optical class: 5 is best, 1 is lowest. *** All listed dimensions include a PVC edge of 2.5 cm. The roll lengths are an indication. Delivered length can be up to 15% higher or lower. Installation and maintenance advice is available on our website.

Contact us for more information:

Our employees are ready to answer your questions or to take your orders.
Call **+31 38 385 35 00**.