



Stelvio - the entrance mat for a clean, inviting welcome

The Stelvio entrance mat meets increasing demand for a high-quality mat that always provides a welcoming entrance, regardless of the weather, even in rain and snow. It's the ideal entrance mat for keeping hotels, high-end retail outlets and prestigious offices clean and safe.


This chic, elegant, walk-off mat guarantees guests and visitors a well-groomed, clean entrance area, even in bad weather conditions. It's a wonderfully voluminous mat in 5 uni colours with a fris  pile construction for a lively feel. The high, dense pile construction (1400 g/m²) provides a soft, luxurious feel while ensuring high dirt absorption (class 3).

An entrance mat that excels in so many aspects, Stelvio is suitable for commercial applications (class 32) and complies with fire class Cfl-s1. The mat is available with an impermeable PVC backing, to protect the subfloor, or with Pura Backing, the PVC-free alternative, which also prevents discolouration of the subfloor.


PURA_{BACKING}

Pura Backing makes walk-off mats more sustainable, by avoiding the use of PVC or plasticizers. It's the answer to increased demand by commercial and home interior furnishers for environmentally friendly and sustainable solutions down to the last detail, including the entrance mat! Mats with Pura Backing satisfy this requirement with zero PVC, zero plasticizers, a lower ecological footprint – and they're easy to install!


Colours




Red
ST91



Beige
ST11



Grey
ST81



Anthracite
ST01



Black
ST51

Specifications


PVC

PURA^{BACKING}

Pile material	100% Polyamide	100% Polyamide
Backing	PVC	PU
Primary backing	nonwoven PET/PA	nonwoven PET/PA
Yarn construction	Frisé	Frisé
Pattern	Uniform	Uniform
Colours	5	5
Pile weight ISO 8543	1400 g/m ²	1400 g/m ²
Total weight ISO 8543	ca. 4200 g/m ²	ca. 3600 g/m²
Pile height ISO 1766	ca. 8,0 mm	ca. 8,0 mm
Total height ISO 1765	ca. 10,0 mm	ca. 10,0 mm
Pile density ISO 8543	0,170 g/m ²	0,170 g/m ²
Number of stitches ISO 1763	ca. 186.800 /m ²	ca. 186.800 /m ²
Use classification EN 1307	32	32
Wearing class EN 1963	32	32
Comfort EN 1307	LC3	LC3
Suitability for stairs EN 1963	Incidental use	Incidental use
Suitability for castor chairs EN 985	Incidental use	Incidental use
Dimensional stability ISO 2551	< 0,2%	< 0,2%
Light fastness ISO 105 B02	>6	>6
Water fastness ISO 105 B01	4-5	4-5
Rubbing fastness ISO 105 X12	4-5	4-5
Salt water ISO 105 E02	4-5	4-5
Shampoo BS 1006	4-5	4-5
Organic solvents ISO 105 X05	4-5	4-5
Absorption capacity TNO W6034	t.b.c.	t.b.c.
Flammability Euroclass EN 13501	Cfl-s1	Cfl-s1
Slip Resistance EN 13893	DS	DS
Static charge ISO 6356	2,0 kV	2,0 kV
Sand absorption class*	3	3
Optical class**	3.5	3.5
Declaration of Performance	Available	Available
Roll dimensions***	135 cm/20 m, 200 cm/20 m	135 cm/20 m, 200 cm/20 m
Roll length	±20 m	±20 m

Where to use?

	high traffic	medium traffic
Not combined with outdoor matting	A	B
Combined with outdoor matting	C	D
Outdoor matting	E	

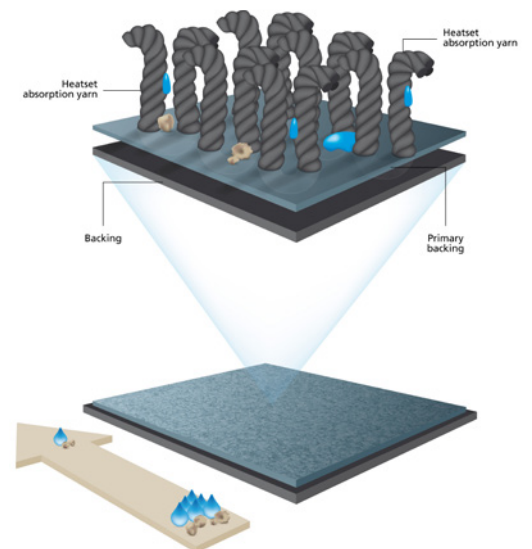

* Sand Absorption Class 3: >=90%, Sand Absorption Class 2: 80% =< class 2 < 90%, Sand Absorption Class 1: =< 80% ** Optical Class: 5 is best, 1 is lowest *** All listed dimensions include a PVC edge of 2.5 cm. The roll lengths are an indication. Delivered length can be up to 15% higher or lower. Installation and maintenance advice is available on our website.

Contact us for more information:

Our employees are ready to answer your questions or to take your orders.

Call **+31 38 385 35 00**.