




# Duratap The most wear-resistant coir mat

Type	Use	Traffic	Mat Matrix
Scraping	Indoor	Medium	B

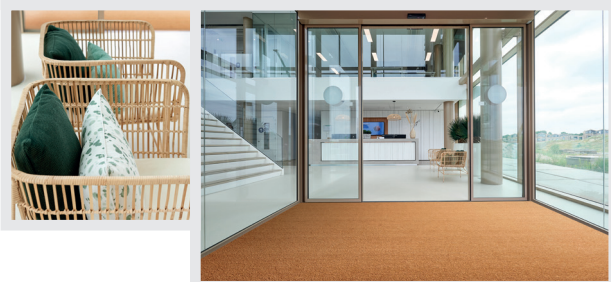

**Duratap is the most wear-resistant coir mat we've ever made. Unique features are its high use class rating of 32 (commercial use) and its fire protection class rating of Cfl-s1. This heavy-duty, tightly tufted mat makes access easy for wheelchairs and rollators.**

## Design

This thick, firm coir mat has a stiff, bristly feel. With the classic touch of coir. Natural variations in the yarn give the mat beautiful colour gradients. These vary from one mat to another, which makes for subtle colour nuances. The distinctive look of coir means this mat complements both classic and modern interiors.

## Matching all floors

Our designers develop colourways that complement every interior style. For ambiances ranging from classic to modern design. The broad Rinos range always has the right solution, to complement both interior design and floor type. **Make your own combination on our website and be inspired by our options.**



Wood light oak floor herringbone coarse  
with Duratap naturel

## Colours




**Naturel**  
K19  
NCS: 3040Y20R

## Specifications

## PVC

Pile material	100% machine-spun coconut fibre yarns
Pile weight ISO 8543	17 mm: $\pm 3,50 \text{ kg m}^2$ 20 mm: $\pm 4,10 \text{ kg m}^2$ 23 mm: $\pm 4,75 \text{ kg m}^2$
Use classification EN 1307	32
Flammability Euroclass EN 13501	Cfl/s1
Sizes rolls ***	100/200 cm, $\pm 10 \text{ m}^1$
Backing	PVC with integrated stability scrim
Absorption capacity TNO W6034	17 mm $\pm 8,4 \text{ l/m}^2$
Total weight ISO 8543	17 mm: $\pm 6,85 \text{ kg m}^2$ 20 mm: $\pm 7,45 \text{ kg m}^2$ 23 mm: $\pm 8,10 \text{ kg m}^2$
Pile height ISO 1766	14, 17, en 20 mm
Total height ISO 1765	17, 20, en 23 mm
Pile density ISO 8543	NPD
Number of stitches ISO 1763	$\pm 41.800$
Wearing class EN 1963	32
Comfort EN 1307	LC5
Dimensional stability ISO 2551	NPD
Light fastness ISO 105 B02	>6
Water fastness ISO 105 B01	3-4
Rubbing fastness ISO 105 X12	3-4
Salt water ISO 105 E02	3-4
Shampoo BS 1006	3-4
Organic solvents ISO 105 X05	3-4
Static charge ISO 6356	2,0 kV
Slip Resistance EN 13893	DS
Yarn construction	Velour
Design	Uni
Colours	1
Suitability for stairs EN 1963	NPD
Suitability for castor chairs EN 985	NPD
Declaration of Performance	Available

 Excluding loose-laid mats  
EN 14061:2004

\* The roll lengths are an indication. Delivered length can be up to 15% higher or lower.  
Installation and maintenance advice is available on our website." Deze opmerking ook onder de specificatietabel op de webpage plaatsen.

# Duratap



## Contact us for more information

Our employees are ready to answer questions or to take your orders. **Call +31 38 385 35 00**  
or mail [customerservice@rinos.com](mailto:customerservice@rinos.com)

## Where to use?

	high traffic	medium traffic
Not combined with outdoor matting (scraping)	<b>A</b>	<b>B</b>
Combined with outdoor matting (absorbing)	<b>C</b>	<b>D</b>
Outdoor matting	<b>E</b>	

© Rinos B.V.

[rinos.com/products/duratap](https://rinos.com/products/duratap)