




# Hudson

The Hudson is an entrance carpet with good absorption ability. It is optimised for moisture absorption and can also handle sand. This dust control mat works best in combination with a scraping outdoor mat against coarser dirt.

The Hudson is pre-eminently suitable for medium-sized companies and projects. In case of normal traffic, the mat is wear-resistant. It works best in entrance areas, stairwells, exits, pantries and lifts.

The mat is velour with a relatively short pile, which makes the mat easy to vacuum. The slightly blended design gives the mat a professional look and feel. Small particles of dirt are less noticeable. The resilient pile made of polyamide yarn also contributes to this. And although it's mixed, the Hudson preserves its modest character. The Hudson fits in every interior.

The Hudson primarily prevents the spread of moisture and dirt. This results in lower maintenance and cleaning costs of all floors. Underlying floors are also well protected by the Hudson against seeped in moisture. The Hudson is a low pile velour mat that finds the right balance between structure and achievements.

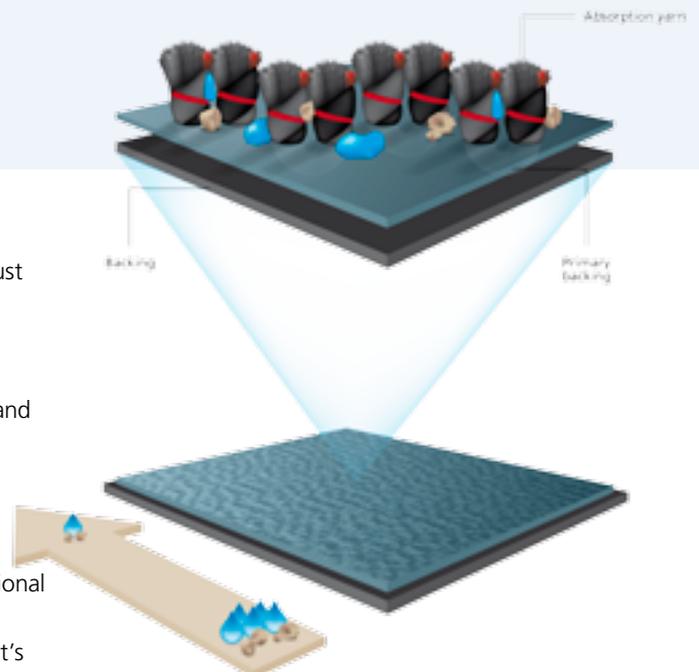

## Specifications

Pile material	100% Polyamide
Backing	PVC
Primary backing	Nonwoven PET/PA
Yarn construction	Velour
Pattern	Blended
Colours	6
Pile weight ISO 8543	550 g/m <sup>2</sup>
Total weight ISO 8543	2700 g/m <sup>2</sup>
Pile height ISO 1766	ca. 4,5 mm
Total height ISO 1765	ca. 6,5 mm
Pile density ISO 8543	0,092 g/cm <sup>3</sup>
Number of stitches ISO 1763	91.000/m <sup>2</sup>
Use classification EN 1307	32
Wearing class EN 1963	32
Comfort EN 1307	LC1
Suitability for stairs EN 1963	Intensive use
Suitability for castor chairs EN 985	Intensive use
Dimensional stability ISO 2551	<0,3%
Light fastness ISO 105 B02	>7
Water fastness ISO 105 B01	4 - 5
Rubbing fastness ISO 105 X12	4 - 5
Salt water ISO 105 E02	4 - 5
Shampoo BS 1006	4 - 5
Organic solvents ISO 105 X05	4 - 5
Absorption capacity TNO W6034	± 4,8 ltr/m <sup>2</sup>
Flammability Euroclass EN 13501	Cfl/s1
Slip Resistance EN 13893	DS
Static charge ISO 6356	> -2,0 kV
Sand absorption class*	1
Optical class**	3
Declaration of Performance	Available
Sizes rolls ***	135 & 200 cm 265 cm on request
Roll length	± 20 m
Sizes mats ***	60x90 cm, 90x150 cm & 135x200 cm

\* Sand absorption class 1: =< 80%, Sand absorption class 2: 80% =< class 2 < 90%. Sand absorption class 3: >=90% \*\* Optical class 5 is best, 1 is lowest. \*\*\* All mentioned sizes include a 2.5 cm PVC border. The roll lengths that are given are a guideline. The actual length can turn out 15% shorter or longer. Laying and maintenance recommendations can be found on our website.




EN 14041:2004

## Where to use?


	high traffic	medium traffic
Not combined with outdoor matting	A	B
Combined with outdoor matting	C	D
Outdoor matting	E	

## Colours

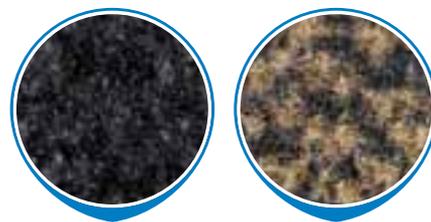


840 - Black

841 - Beige

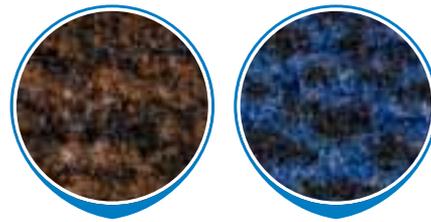

842 - Brown

846 - Blauw

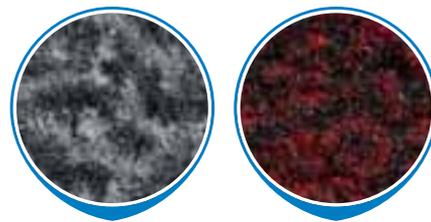

848 - Grey

849 - Red

## Contact us for more information:

Our employees are ready to answer your questions or to take your orders. Call **+31 38 385 35 00**.

