




Prisma

Prisma barrier matting features good absorption ability for moisture and dirt. The range of different colours available makes it ideal for both the commercial and domestic environment. The Prisma works well in combination with an outdoor mat.

The Prisma is an ideal solution for residential situations or other locations with normal traffic. For instance, private homes or small offices. The barrier matting is easy to maintain.

The curly yarn construction provides a vibrant surface texture that has been processed to produce a comfortable feel. The mat has a warm and soft appearance. Thanks to the yarns used the pile is tough and resilient and you can count on its enduring dirt-concealing capabilities. The barrier matting is easy to maintain. The dust control mat version is washable in the washing machine at 30 degrees.

Prisma is available in many different uni-colours and is, therefore, easy to combine with the rest of any particular interior. Its phthalate free PVC backing protects the surface beneath from tracked-in moisture. With the choice of ten different colours there is a Prisma to suit you.

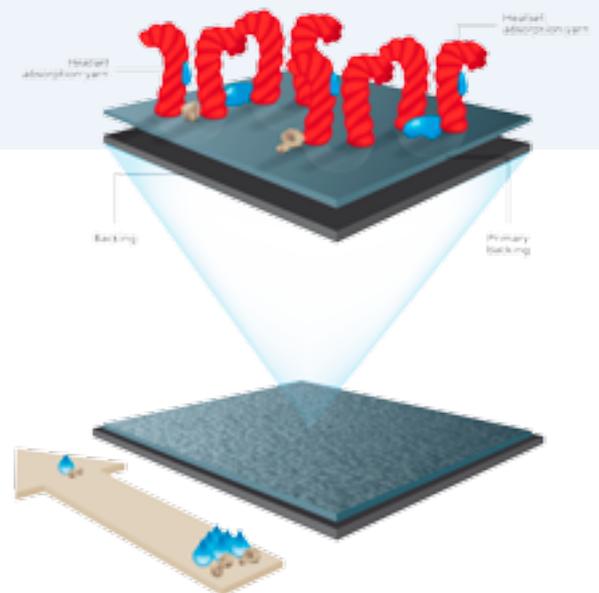

Specifications

Pile material	100% Polyamide
Backing	Mats: washable rubber vinyl backing, Rolls: PVC
Primary backing	nonwoven PET/PA
Yarn construction	Frisé
Pattern	Uni
Colours	7
Pile weight ISO 8543	± 620 g/m ²
Total weight ISO 8543	± 2.820 g/m ²
Pile height ISO 1766	± 5,5 mm
Total height ISO 1765	± 7,0 mm
Pile density ISO 8543	0,109 g/cm ³
Number of stitches ISO 1763	± 118.900 /m ²
Use classification EN 1307	31
Wearing class EN 1963	31
Comfort EN 1307	LC2
Suitability for stairs EN 1963	Occasional use
Suitability for castor chairs EN 985	Occasional use
Dimensional stability ISO 2551	< 0,5 %
Light fastness ISO 105 B02	5 - 6
Water fastness ISO 105 B01	4 - 5
Rubbing fastness ISO 105 X12	4 - 5
Salt water ISO 105 E02	4 - 5
Shampoo BS 1006	4 - 5
Organic solvents ISO 105 X05	4 - 5
Absorption capacity TNO W6034	± 5,4 l/m ²
Flammability Euroclass EN 13501	Ffl / Cfl/s1
Slip Resistance EN 13893	DS
Static charge ISO 6356	< -2,0 kV
Sand absorption class*	NPD
Optical class**	NPD
Declaration of Performance	Available
Sizes rolls***	135 & 200 cm 265 cm on request
Roll length	± 20 m
Sizes mats***	40/60 cm, 60/90 cm & 90/150 cm

* Sand absorption class 1: =< 80%, Sand absorption class 2: 80% =< class 2 < 90%. Sand absorption class 3: >=90% ** Optical class 5 is best, 1 is lowest.
*** All mentioned sizes include a 2.5 cm PVC border. The roll lengths that are given are a guideline. The actual length can turn out 15% shorter or longer. Laying and maintenance recommendations can be found on our website.

Contact us for more information:

Our employees are ready to answer your questions or to take your orders. Call **+31 38 385 35 00**.

Where to use?

	high traffic	medium traffic
Not combined with outdoor matting	A	B
Combined with outdoor matting	C	D
Outdoor matting	E	

Colours




Black 900

Beige 901



Brown 902

Bordeaux 904

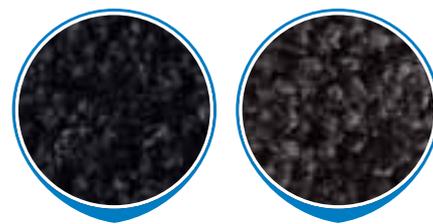

Indigo 905

Grey 908



Red 909



EN 14041:2004