

Moss Absorbs up to 3x more moisture

Also available with Pura Backing™

HYDROTX™

ECONYL®

Type	Use	Traffic	Mat Matrix
Absorbent	Indoor	High	C




Moss: highly absorbent walk-off entrance carpet in an extensive colour range, for demanding commercial environments in which design and ambience are important.

Design

Moss has a matt appearance. The cut, heat-set, frisée creates a 'sandy' pile definition. The subtle, grey accent is reflected in every colourway and enhances the mat's lively appearance. The grey and brown tones match any floor – whether oak, marble, stone, terrazzo or ceramic. The green tone is special, as biomimicry and sustainability are green principles that are increasingly being applied to interior design.

Matching all floors

Our designers develop colourways that complement every interior style. For ambiances ranging from classic to modern design. The broad Rinos range always has the right solution, to complement both interior design and floor type. **Make your own combination on our website and be inspired by our options.**

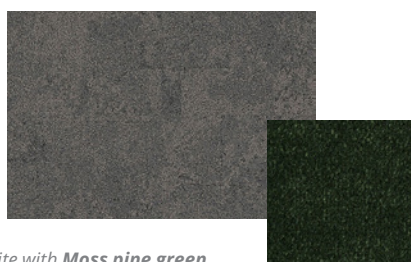

Carpet tile warm granite with Moss pine green


Colours



Ash grey
MO83
NCS: 8502Y



Brick red
MO92
NCS: 7020Y70R



Charcoal grey
MO51
NCS: 8502G




Concrete grey
MO81
NCS: 5005Y20R



Limestone grey
MO11
NCS: 6010G70Y



Maroon red
MO91
NCS: 5540Y90R




Pine green
MO71
NCS: 8010G30Y



Sandstone ocre
MO31
NCS: 6020Y



Slate grey
MO82
NCS: 7005G80Y




Walnut brown
MO21
NCS: 7010Y30R

Specifications

PVC

PURA^{BACKING}

Pile material	PA6/ECONYL® (100%)	PA6/ECONYL® (100%)
Pile weight ISO 8543	900 gr/m ²	900 gr/m ²
Use classification EN 1307	33	33
Flammability Euroclass EN 13501	Bfl/s1	Cfl/s1
Sizes rolls ***	135/200 cm, ± 20 m ¹	135/200 cm, ± 20 m ¹
Sizes mats***	60/90, 90/150, 135/200 cm	60/90, 90/150, 135/200 cm
Backing	PVC	PU
Sand absorption class*	2	2
Optical class**	2,5	2,5
Absorption capacity TNO W6034	5,0 l/m ²	5,0 l/m ²
Total weight ISO 8543	3.700 gr/m ²	3.100 gr/m²
Pile height ISO 1766	6 mm	6 mm
Total height ISO 1765	8.5 mm	8.5 mm
Pile density ISO 8543	0,128 g/cm ²	0,128 g/cm ²
Number of stitches ISO 1763	118.000 /m ²	118.000 /m ²
Wearing class EN 1963	33	33
Comfort EN 1307	LC3	LC3
Dimensional stability ISO 2551	≤ 0,4%	≤ 0,4%
Light fastness ISO 105 B02	> 6	> 6
Water fastness ISO 105 B01	4	4
Rubbing fastness ISO 105 X12	4-5	4-5
Salt water ISO 105 E02	4-5	4-5
Shampoo BS 1006	4	4
Organic solvents ISO 105 X05	4	4
Static charge ISO 6356	< 2 kV	< 2 kV
Slip Resistance EN 13893	DS	DS
Yarn construction	Velour	Velour
Design	Uni	Uni
Colours	10	10
Suitability for stairs EN 1963	occasional use	occasional use
Suitability for castor chairs EN 985	occasional use	occasional use
Primary backing	nonwoven PET/PA	nonwoven PET/PA
Declaration of Performance	Available	Available

 Excluding loose-laid mats
EN 14061:2004

* Sand Absorption Class 3: ≥90%, Sand Absorption Class 2: 80% ≤ class 2 < 90%, Sand Absorption Class 1: ≤ 80% ** Optical Class: 5 is best, 1 is lowest *** All listed dimensions include a PVC edge of 2.5 cm. The roll lengths are an indication. Delivered length can be up to 15% higher or lower. Installation and maintenance advice is available on our website.

PURA^{BACKING}

Pura Backing™ is a unique Rinos product innovation, developed by our R&D department. It's the Rinos answer to increasing demand for more environmentally friendly and sustainable entrance mat solutions by avoiding the use of PVC and plasticisers. Mats with Pura Backing™ meet this requirement – with zero PVC and plasticiser content, avoiding stains on porous subfloors. Thanks to increased flexibility, it is even easier to install!

Contact us for more information

Our employees are ready to answer questions or to take your orders. **Call +31 38 385 35 00** or mail customerservice@rinos.com

Where to use?

	high traffic	medium traffic
Not combined with outdoor matting (scraping)	A	B
Combined with outdoor matting (absorbing)	C	D
Outdoor matting	E	

© Rinos B.V.

rinos.com/products/moss