


Victoria High-end entrance mat

Also available with Pura Backing™

ECONYL®

Type	Use	Traffic	Mat Matrix
Scraping	Indoor	High	A

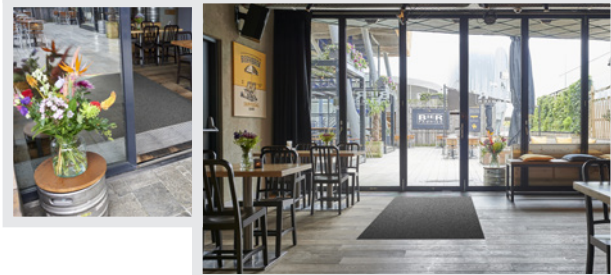

Victoria is a durable walk-off entrance mat made of recycled polyamide yarn in 9 contemporary colours - also available with PVC-free Pura Backing™.

Design

Victoria feels firm and secure thanks to its bristly scraper fibre. The anthracite base tone has subtly varying colour accents. The cut pile consists of soft, multicoloured fibres and a hard, black scraper fibre. Oily, black tones are made up of a series of blues over greys that segue into brown and red tints. Victoria can subtly repeat the colour of a logo displayed in the entrance area, or echo the accent colour of upholstery fabrics.



Natural stones tile dark grey with **Victoria Green**


Matching all floors

Our designers develop colourways that complement every interior style. For ambiances ranging from classic to modern design. The broad Rinos range always has the right solution, to complement both interior design and floor type. **Make your own combination on our website and be inspired by our options.**


Colours




Black
130
NCS: 9000N




Blue
136
NCS: 8005R80B




Brown
132
NCS:8005Y80R




Dark Brown
134
NCS: 8500N




Green
137
NCS: 8005B20G




Grey
135
NCS:8000N



Red
139
NCS: 8502R



Slate Brown
131
NCS:7502R




Slate Grey
138
NCS:7502B

Specifications

PVC

PURA^{BACKING}

Pile material	100% recycled (ECONYL®) Polyamide	100% recycled (ECONYL®) Polyamide
Pile weight ISO 8543	900 g/m ²	900 g/m ²
Use classification EN 1307	33	33
Flammability Euroclass EN 13501	Bfl-s1	Cfl-s1
Sizes rolls ***	135/200 cm, ± 20 m ¹	135/200 cm, ± 20 m ¹
Sizes mats***	60/90, 90/150, 135/200 cm	60/90, 90/150, 135/200 cm
Backing	PVC	PU
Sand absorption class*	3	3
Optical class**	3,5	3,5
Absorption capacity TNO W6034	± 4,8l/m ²	± 4,8l/m ²
Total weight ISO 8543	ca. 3.700 g/m ²	ca. 3.100 g/m²
Pile height ISO 1766	ca. 6,0 mm	ca. 6,0 mm
Total height ISO 1765	ca. 8,0 mm	ca. 8,0 mm
Pile density ISO 8543	0,148 g/cm ²	0,148 g/cm ²
Number of stitches ISO 1763	ca. 95.800 /m ²	ca. 95.800 /m ²
Wearing class EN 1963	33	33
Comfort EN 1307	LC3	LC3
Dimensional stability ISO 2551	< 0,4%	< 0,4%
Light fastness ISO 105 B02	>7	>7
Water fastness ISO 105 B01	>4	>4
Rubbing fastness ISO 105 X12	>4	>4
Salt water ISO 105 E02	4	4
Shampoo BS 1006	4	4
Organic solvents ISO 105 X05	4	4
Static charge ISO 6356	2,0 kV	2,0 kV
Slip Resistance EN 13893	DS	DS
Yarn construction	Velours	Velours
Design	Gemêleerd	Gemêleerd
Colours	9	9
Suitability for stairs EN 1963	Intensive use	Intensive use
Suitability for castor chairs EN 985	Intensive use	Intensive use
Primary backing	nonwoven PET/PA	nonwoven PET/PA
Declaration of Performance	Available	Available

 Excluding loose-laid mats
EN 14061:2004

* Sand Absorption Class 3: >=90%, Sand Absorption Class 2: 80% =< class 2 < 90%, Sand Absorption Class 1: =< 80% ** Optical Class: 5 is best, 1 is lowest *** All listed dimensions include a PVC edge of 2.5 cm. The roll lengths are an indication. Delivered length can be up to 15% higher or lower. Installation and maintenance advice is available on our website.

PURA^{BACKING}

Pura Backing™ makes walk-off entrance mats more sustainable by avoiding the use of PVC and plasticisers. It's the response to increasing demand by commercial and residential decorators for environmental sensitivity and sustainability, down to the last details – even when it comes to entrance mats. Mats with Pura Backing™ meet this requirement – with zero PVC and plasticiser content and a smaller environmental footprint, while being even easier to install!

Also available as tiles

Backing	Bitumen
Colours	Grey 135, Brown 132
Total weight	4000 g/m ²
Total height	9 mm
Flammability EN 13501	Cfl-s1
Dimensional stability EN 986/ISO 2551	Passed (<0,2%)
Size	50*50 cm
Packaging	3 m ²

Contact us for more information

Our employees are ready to answer questions or to take your orders. **Call +31 38 385 35 00** or mail customerservice@rinos.com

Where to use?

	high traffic	medium traffic
Not combined with outdoor matting (scraping)	A	B
Combined with outdoor matting (absorbing)	C	D
Outdoor matting	E	

© Rinos B.V.

rinos.com/products/victoria