


Dimensions  
Keeps out  
moisture and dirt

Also available with Pura Backing™

ECONYL®

Type	Use	Traffic	Mat Matrix
Scraping	Indoor	High	A

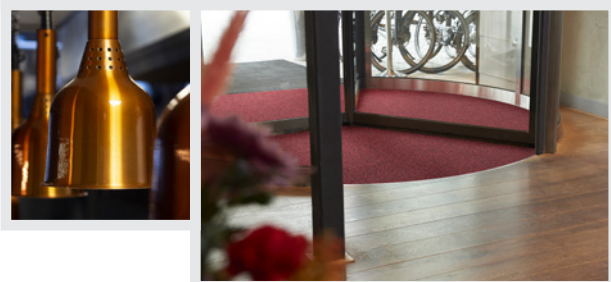

**Dimensions, a superior, high-traffic entrance mat that keeps buildings free from moisture and dirt; also available with PVC-free Pura Backing.**

### Design

The high-twist yarn creates a pebbled texture – the coarse loop pile provides an irregular, organic look. The shiny scraper fibre and matt yarns give depth to Dimensions. This texture comes into its own when contrasted with pebbles, concrete or stone. In classic anthracite, blue, red and brown and a contemporary grey-taupe shade, for a light, sleek interior.



Concrete with *Dimensions* grey


### Matching all floors

Our designers develop colourways that complement every interior style. For ambiances ranging from classic to modern design. The broad Rinos range always has the right solution, to complement both interior design and floor type. **Make your own combination on our website and be inspired by our options.**


## Colours



**Anthracite**  
930  
NCS: 8500N




**Brown**  
932  
NCS: 8505Y80R



**Blue**  
936  
NCS: 8010R90B



**Grey**  
938  
NCS: 8000N




**Red**  
939  
NCS: 6030R10B

## Specifications

### PVC

### PURA<sup>®</sup> BACKING

Pile material	100% regenerated ECONYL <sup>®</sup> Polyamide	100% regenerated ECONYL <sup>®</sup> Polyamide
Pile weight ISO 8543	ca. 700 g/m <sup>2</sup>	700 g/m <sup>2</sup>
Use classification EN 1307	32	32
Flammability Euroclass EN 13501	Cfl-s1	Cfl-s1
Sizes rolls (w*I) ***	135 cm/ 20 m <sup>1</sup> , 200 cm/ 20 m <sup>1</sup>	135 cm/ 20 m <sup>1</sup> , 200 cm/ 20 m <sup>1</sup>
Sizes mats (w*I) ***	60*90, 90*150, 135*200 cm	60*90, 90*150, 135*200 cm
Backing	Phtalate-free PVC	PU
Sand absorption class*	2	2
Optical class**	4,5	4,5
Absorption capacity TNO W6034	ca. 5,2 l/m <sup>2</sup>	5,2 l/m <sup>2</sup>
Total weight ISO 8543	ca. 3.600 g/m <sup>2</sup>	ca. 2.900 g/m <sup>2</sup>
Pile height ISO 1766	ca. 5,5 mm	ca. 5,5 mm
Total height ISO 1765	ca. 7,5 mm	ca. 7,5 mm
Pile density ISO 8543	0,120 g/cm <sup>2</sup>	0,120 g/cm <sup>2</sup>
Number of stitches ISO 1763	ca. 71.100 /m <sup>2</sup>	ca. 71.100 /m <sup>2</sup>
Wearing class EN 1963	32	32
Comfort EN 1307	LC3	LC3
Dimensional stability ISO 2551	<0,2 %	<0,2 %
Light fastness ISO 105 B02	7	7
Water fastness ISO 105 B01	4 - 5	4 - 5
Rubbing fastness ISO 105 X12	4 - 5	4 - 5
Salt water ISO 105 E02	4 - 5	4 - 5
Shampoo BS 1006	4 - 5	4 - 5
Organic solvents ISO 105 X05	4 - 5	4 - 5
Static charge ISO 6356	<0,7 kV	<0,7 kV
Slip Resistance EN 13893	DS	DS
Yarn construction	Loop pile	Loop pile
Design	Heathered	Heathered
Colours	5	5
Suitability for stairs EN 1963	Intensive use	Intensive use
Suitability for castor chairs EN 985	Intensive use	Intensive use
Primary backing	nonwoven PET/PA	nonwoven PET/PA
Thermal resistance EN 12667	0,090 m <sup>2</sup> K/W	0,090 m <sup>2</sup> K/W
Impact sound insulation EN 1307 annex D.	≥ 25 dB	≥ 25 dB
Colouring	Solution dyed	Solution dyed
Circularity index	73 %	61 %

 Excluding loose-laid mats  
EN 14041:2004

\* Sand Absorption Class 3: ≥90%, Sand Absorption Class 2: 80% ≤ class 2 < 90%, Sand Absorption Class 1: ≤ 80% \*\* Optical Class: 5 is best, 1 is lowest \*\*\* All listed dimensions include a PVC edge of 2.5 cm. The roll lengths are an indication. Delivered length can be up to 15% higher or lower. Installation and maintenance advice is available on our website.

## PURA<sup>®</sup> BACKING

Pura Backing™ makes walk-off entrance mats more sustainable by avoiding the use of PVC and plasticisers. It's the response to increasing demand by commercial and residential decorators for environmental sensitivity and sustainability, down to the last details – even when it comes to entrance mats. Mats with Pura Backing™ meet this requirement – with zero PVC and plasticiser content and a smaller environmental footprint, while being even easier to install!

## Contact us for more information

Our employees are ready to answer questions or to take your orders. **Call +31 38 385 35 00** or mail [customerservice@rinos.com](mailto:customerservice@rinos.com)

## Where to use?

	high traffic	medium traffic
Not combined with outdoor matting (scraping)	<b>A</b>	<b>B</b>
Combined with outdoor matting (absorbing)	<b>C</b>	<b>D</b>
Outdoor matting	<b>E</b>	

© Rinos B.V.

[rinos.com/products/dimensions](https://rinos.com/products/dimensions)