




# Prisma

## A colour for every interior

Also available with Pura Backing™

ECONYL®


Type	Use	Traffic	Mat Matrix
Absorbent	Indoor	Medium	D

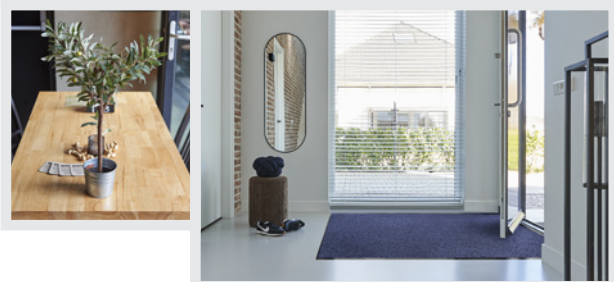

**Prisma is an easy-to-maintain, absorbent, walk-off entrance carpet in seven warm colours, for homes and small offices.**

### Design

Prisma is a low-pile, glossy, walk-off entrance carpet with a cut, friséed pile for a subtle shadow effect. The lustre of the yarn enables bright, fresh uni colours. The sparkling scarlet colourway, for instance, means entrance areas can provide a real red-carpet welcome. The golden beige and copper browns complement the metals used in interior furniture fittings and lamps, as do the steel grey and the deep black tones. The midnight blue colour is a surprising combination of grey and black tones, such as those used to powder coat metal window frames and doors.

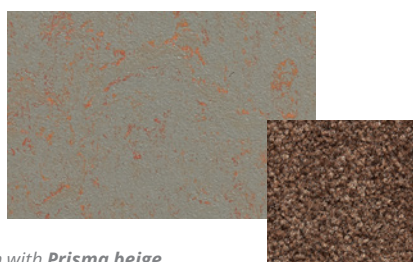


Linoleum copper loam with Prisma beige


### Matching all floors

Our designers develop colourways that complement every interior style. For ambiances ranging from classic to modern design. The broad Rinos range always has the right solution, to complement both interior design and floor type. **Make your own combination on our website and be inspired by our options.**


## Colours




**Beige**  
901  
NCS: 8010G90Y




**Bordeaux**  
904  
NCS: 7020R



**Brown**  
902  
NCS: 8010Y50R




**Grey**  
908  
NCS: 8502G



**Indigo**  
905  
NCS: 8505R80B



**Red**  
909  
NCS: 3560R




**Black**  
900  
NCS: 9000N

## Specifications

### PVC

### PURA<sup>BACKING</sup>

Pile material	100% regenerated ECONYL® Polyamide	100% regenerated ECONYL® Polyamide
Pile weight ISO 8543	ca. 620 g/m <sup>2</sup>	ca. 620 g/m <sup>2</sup>
Use classification EN 1307	31	31
Flammability Euroclass EN 13501	Cfl-s1	Cfl-s1
Sizes rolls (w*I) ***	135 cm/ 20 m <sup>1</sup> , 200 cm/ 20 m <sup>1</sup>	135 cm/ 20 m <sup>1</sup> , 200 cm/ 20 m <sup>1</sup>
Sizes mats (w*I) ***	60*90, 90*150, 135*200 cm	60*90, 90*150, 135*200 cm
Backing	Rolls: PVC. Mats: washable PVC	PU
Sand absorption class*	n.p.d.	n.p.d.
Optical class**	n.p.d.	n.p.d.
Absorption capacity TNO W6034	5,4 l/m <sup>2</sup>	5,4 l/m <sup>2</sup>
Total weight ISO 8543	ca. 2.820 g/m <sup>2</sup>	ca. 2.720 g/m <sup>2</sup>
Pile height ISO 1766	ca. 5,5 mm	ca. 5,5 mm
Total height ISO 1765	ca. 7,0 mm	ca. 7,0 mm
Pile density ISO 8543	0,109 g/cm <sup>2</sup>	0,109 g/cm <sup>2</sup>
Number of stitches ISO 1763	ca. 118.900 /m <sup>2</sup>	ca. 118.900 /m <sup>2</sup>
Wearing class EN 1963	31	31
Comfort EN 1307	LC2	LC2
Dimensional stability ISO 2551	<0,5 %	<0,5 %
Light fastness ISO 105 B02	5 - 6	5 - 6
Water fastness ISO 105 B01	4 - 5	4 - 5
Rubbing fastness ISO 105 X12	4 - 5	4 - 5
Salt water ISO 105 E02	4 - 5	4 - 5
Shampoo BS 1006	4 - 5	4 - 5
Organic solvents ISO 105 X05	4 - 5	4 - 5
Static charge ISO 6356	<-2,0 kV	-2,0 kV
Slip Resistance EN 13893	DS	DS
Yarn construction	Frisé	Frisé
Design	Plain	Plain
Colours	7	7
Suitability for stairs EN 1963	Incidental use	Incidental use
Suitability for castor chairs EN 985	Incidental use	Incidental use
Primary backing	nonwoven PET/PA	nonwoven PET/PA
Thermal resistance EN 12667	0,08 m <sup>2</sup> K/W	0,08 m <sup>2</sup> K/W
Impact sound insulation EN 1307 annex D.	≥ 20 dB	≥ 20 dB
Colouring	Piece dyed	Piece dyed
Circularity index	73 %	60 %

 Excluding loose-laid mats  
EN 14041:2004

\* Sand Absorption Class 3: ≥90%, Sand Absorption Class 2: 80% ≤ class 2 < 90%, Sand Absorption Class 1: ≤ 80% \*\* Optical Class: 5 is best, 1 is lowest \*\*\* All rolls include a PVC edge of 2.5 cm. All mats include a rubber/PVC edge of 1,5 cm. The roll lengths are an indication. Delivered length can be up to 15% higher or lower.

## PURA<sup>BACKING</sup>

Pura Backing™ is a unique Rinos product innovation, developed by our R&D department. It's the Rinos answer to increasing demand for more environmentally friendly and sustainable entrance mat solutions by avoiding the use of PVC and plasticisers. Mats with Pura Backing™ meet this requirement – with zero PVC and plasticiser content, avoiding stains on porous subfloors. Thanks to increased flexibility, it is even easier to install!

## Contact us for more information

Our employees are ready to answer questions or to take your orders. **Call +31 38 385 35 00** or mail [customerservice@rinos.com](mailto:customerservice@rinos.com)

## Where to use?

	high traffic	medium traffic
Not combined with outdoor matting (scrapping)	A	B
Combined with outdoor matting (absorbing)	C	D
Outdoor matting	E	

© Rinos B.V.

[rinos.com/products/prisma](https://rinos.com/products/prisma)