




# Stelvio

## For a welcoming, clean entrance

Also available with Pura Backing™

ECONYL®


Type	Use	Traffic	Mat Matrix
Absorbent	Indoor	High	C

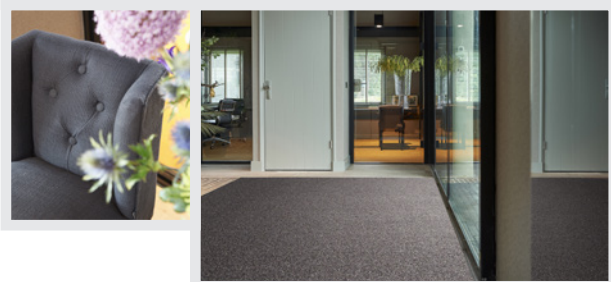

**Stelvio is an absorbent entrance mat, with voluminous, luxurious characteristics - for a welcoming reception in stylish commercial environments, even in conditions of heavy rain and snow.**

### Design

Stelvio has a silky shine, while feeling thick and luxurious. The cut, friséed pile gives Stelvio a subtle touch. The light shades are reminiscent of platinum and silver, while the two grey tones are warm and full. The chic, wine-red tone is inviting. And the two, beautiful, light shades of grey and beige work particularly well in combination with blond wood, brushed metals and natural upholstery materials such as linen and leather.

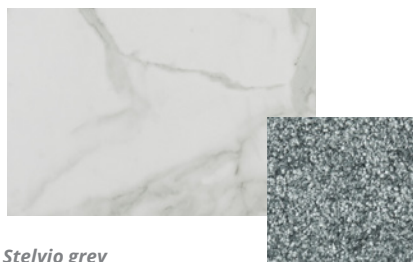


Linoleum neutral with Stelvio grey


### Matching all floors

Our designers develop colourways that complement every interior style. For ambiances ranging from classic to modern design. The broad Rinos range always has the right solution, to complement both interior design and floor type. **Make your own combination on our website and be inspired by our options.**


## Colours




**Red**  
ST91  
NCS: 6030R




**Beige**  
ST11  
NCS: 6010G90Y



**Grey**  
ST81  
NCS: 6010B70G



**Anthracite**  
ST01  
NCS: 8502Y




**Black**  
ST51  
NCS: 9000N

## Specifications

### PVC

### PURA<sup>BACKING</sup>

Pile material	100% regenerated ECONYL <sup>®</sup> Polyamide	100% regenerated ECONYL <sup>®</sup> Polyamide
Pile weight ISO 8543	ca. 1.400 g/m <sup>2</sup>	ca. 1.400 g/m <sup>2</sup>
Use classification EN 1307	32	32
Flammability Euroclass EN 13501	Cfl-s1	Cfl-s1
Sizes rolls (w*I) ***	135 cm/ 20 m <sup>1</sup> , 200 cm/ 20 m <sup>1</sup>	135 cm/ 20 m <sup>1</sup> , 200 cm/ 20 m <sup>1</sup>
Sizes mats (w*I) ***	n.a.	n.a.
Backing	Phtalate-free PVC	PU
Sand absorption class*	3	3
Optical class**	3,5	3,5
Absorption capacity TNO W6034	7,4 l/m <sup>2</sup>	7,4 l/m <sup>2</sup>
Total weight ISO 8543	ca. 4.200 g/m <sup>2</sup>	ca. 3.600 g/m <sup>2</sup>
Pile height ISO 1766	ca. 8,0 mm	ca. 8,0 mm
Total height ISO 1765	ca. 10,0 mm	ca. 10,0 mm
Pile density ISO 8543	0,170 g/cm <sup>2</sup>	0,170 g/cm <sup>2</sup>
Number of stitches ISO 1763	ca. 186.800 /m <sup>2</sup>	ca. 186.800 /m <sup>2</sup>
Wearing class EN 1963	32	32
Comfort EN 1307	LC3	LC3
Dimensional stability ISO 2551	<0,2 %	<0,2 %
Light fastness ISO 105 B02	>6	>6
Water fastness ISO 105 B01	4 - 5	4 - 5
Rubbing fastness ISO 105 X12	4 - 5	4 - 5
Salt water ISO 105 E02	4 - 5	4 - 5
Shampoo BS 1006	4 - 5	4 - 5
Organic solvents ISO 105 X05	4 - 5	4 - 5
Static charge ISO 6356	<2,0 kV	<2,0 kV
Slip Resistance EN 13893	DS	DS
Yarn construction	Frisé	Frisé
Design	Plain	Plain
Colours	5	5
Suitability for stairs EN 1963	Incidental use	Incidental use
Suitability for castor chairs EN 985	Incidental use	Incidental use
Primary backing	nonwoven PET/PA	nonwoven PET/PA
Thermal resistance EN 12667	0,08 m <sup>2</sup> K/W	0,08 m <sup>2</sup> K/W
Impact sound insulation EN 1307 annex D.	≥ 25 dB	≥ 25 dB
Colouring	Piece dyed	Piece dyed
Circularity index	77 %	69 %

 Excluding loose-laid mats  
EN 14041:2004

\* Sand Absorption Class 3: ≥90%, Sand Absorption Class 2: 80% ≤ class 2 < 90%, Sand Absorption Class 1: ≤ 80% \*\* Optical Class: 5 is best, 1 is lowest \*\*\* All listed dimensions include a PVC edge of 2.5 cm. The roll lengths are an indication. Delivered length can be up to 15% higher or lower. Installation and maintenance advice is available on our website.

## PURA<sup>BACKING</sup>

Pura Backing™ is a unique Rinos product innovation, developed by our R&D department. It's the Rinos answer to increasing demand for more environmentally friendly and sustainable entrance mat solutions by avoiding the use of PVC and plasticisers. Mats with Pura Backing™ meet this requirement – with zero PVC and plasticiser content, avoiding stains on porous subfloors. Thanks to increased flexibility, it is even easier to install!

## Contact us for more information

Our employees are ready to answer questions or to take your orders. **Call +31 38 385 35 00** or mail [customerservice@rinos.com](mailto:customerservice@rinos.com)

## Where to use?

	high traffic	medium traffic
Not combined with outdoor matting (scraping)	A	B
Combined with outdoor matting (absorbing)	C	D
Outdoor matting	E	

© Rinos B.V.

[rinos.com/products/stelvio](https://rinos.com/products/stelvio)